

Description

The Pitot Tube is a differential pressure producer suitable for air flow measurement. It includes multiple sensing points to measure total and static pressures. It is easy to install and cost effective. It offers simple, low cost installation into pipes and ducts, and high energy savings due to its low unrecovered pressure loss. There are no moving parts or sharp edges to wear, so long term accuracy can be maintained. It contains a rubber cap, Plastic base and two 1 meters length air tube.



Features:

- Air Flow Measurement
- Low Installation Costs
- Long Term Accuracy
- Minimal Unrecovered Pressure Loss
- Mass Flow Measurement



Pitot Extrusion



Air tube



Plastic Base




Rubber cap




Screw

Specifications

Probe	Material	Aluminium alloy
	Dimensions	7.8 x 19.5mm (0.3"x 0.8")
	Tubing inner diameter	Φ3.8mm
Rubber cap	Material	Rubber
	Connections	To suit 4mm (0.16") i/d PVC air tubing
Duct flange	Material	ABS
	Dimensions	30 x 75mm (1.2"X 3")
Air tube	Material	PU
	Dimensions	inside and out side diameter Φ 4 x Φ6mm length 1m

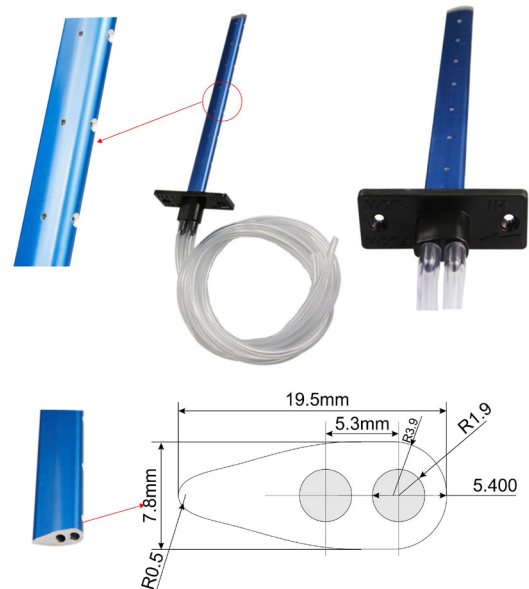

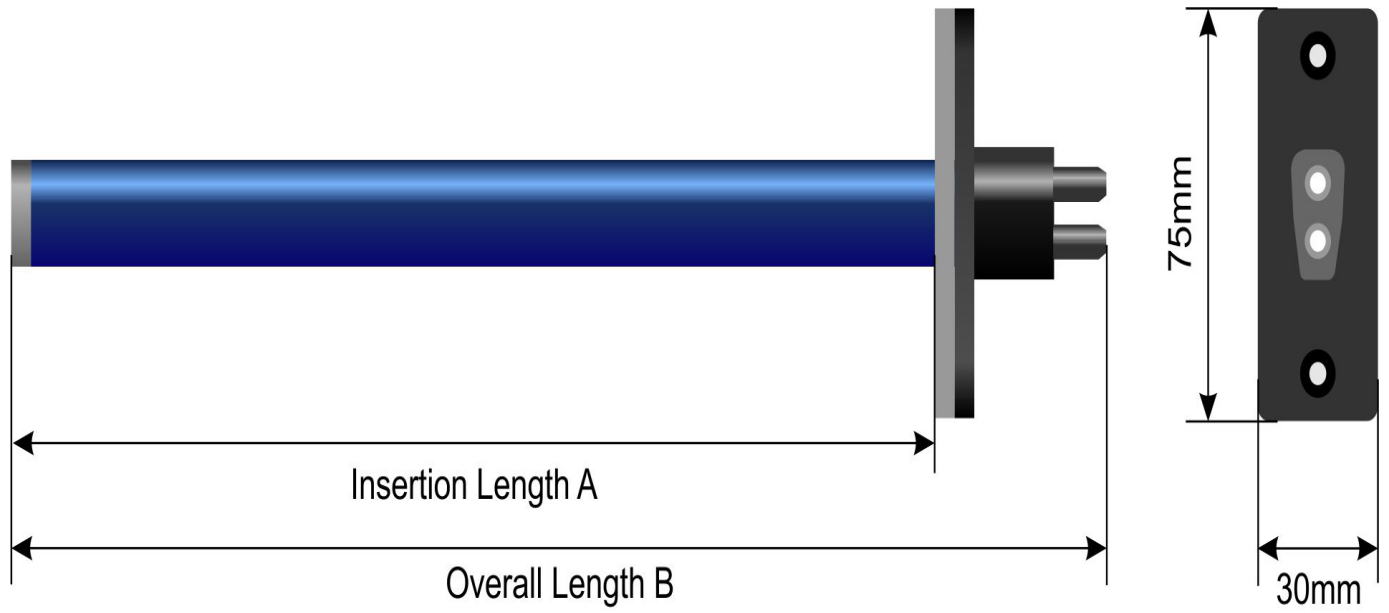

Insertion Length A (mm)	Overall Length B (mm)
150	193
200	243
250	293
300	343
1000	1043
Other custom lengths are available, no minimum order	

K Factor

Velocity (KM/H)	Pitot length(mm)	150	200	250	300	350	Average (mBar)	Comments / Remarks
	Fan speed(Hz)							
25.2	60	0.420	0.421	0.427	0.424	0.451	0.429	
23.7	55	0.360	0.365	0.377	0.368	0.393	0.373	
21.7	50	0.306	0.307	0.314	0.308	0.332	0.313	
19.8	45	0.245	0.250	0.258	0.251	0.269	0.255	
17.7	40	0.197	0.195	0.198	0.195	0.208	0.199	
15.1	35	0.146	0.148	0.149	0.147	0.156	0.149	
12.6	30	0.103	0.101	0.102	0.100	0.107	0.103	
9.6	25	0.060	0.060	0.059	0.056	0.059	0.059	
7.4	20	0.032	0.033	0.034	0.034	0.036	0.034	

Fan Speed (Hz)	Left Side (KM/H)	Center (KM/H)	Right Side (KM/H)	Average Speed (KM/H)
60	25.1	24.8	25.6	25.2
55	23.6	23.3	24.1	23.7
50	21.7	21.2	22.2	21.7
45	19.6	19.4	20.3	19.8
40	17.7	17.4	17.9	17.7
35	15.1	14.8	15.4	15.1
30	12.8	12.4	12.6	12.6
25	9.6	9.4	9.7	9.6
20	7.7	7.2	7.4	7.4

Velocity(KM/H) column data in up table is same as Average speed(KM/H) column data in below table.


Average speed(KM/H)=(left side(KM/H) + center(KM/H) + right side(KM/H)) /3

Average(mBar)=(150column + 200column + 250column + 300column+ 350column) /5

Pitot tube

Instructions for installation

1 Duct orientation and sensor mounting

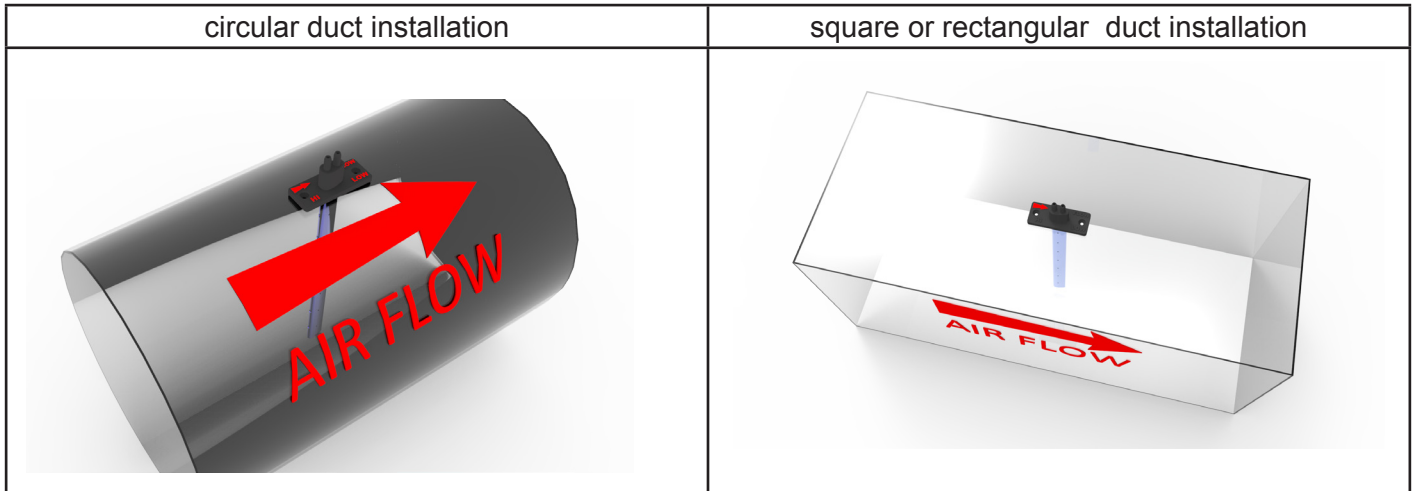


2 Instructions for installation

Step1: The primary station can be installed in any position on vertical or horizontal lines. However consideration to easy access of instrument connections should be given.

Step2: See location instructions for best results.

Step3: Drill a 1-7/8" hole in the center of the duct or pipe where the sensor is to be installed. Drill a 1/2" hole on the opposite side for the double support.

Step4: Attach opposite end-guide rod and pass through both holes. Ensure correct direction of flow. Secure mounting plate to duct or pipe with (2) self-tapping screws.

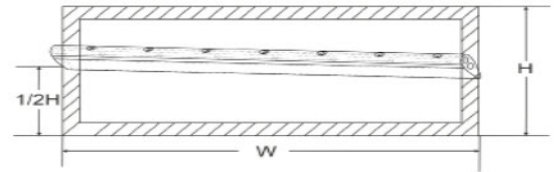

Preferred Mounting

