
 <b>TI601en</b>	<b>Technical Information</b>	
<b>TUU1- Series (T)</b>	<b>Universal Temperature Sensor with Active Output</b>	


The TUU1- Series (T) is designed to measure temperature for universal use

The sensor operates with low voltage power supply

Several cable length are available to fit all common applications

Multiple measuring ranges on board available

The temperature sensor output is active

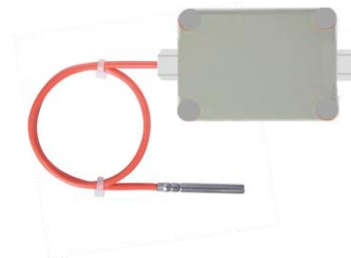

<b>USE</b>	<p>Compatible to all common HVAC DDC and Analog Controls systems, with/without Building Automation System</p> <p>Temperature measuring on pipe surfaces</p> <p>Used in all common HVAC applications</p> <p>Used in Commercial and Industrial Buildings</p>
------------	--

<b>Features</b>	<p>Sensor with active output</p> <p>Sensor Output 0...10V and 4...20mA</p> <p>Multiple (4) measuring ranges on board available</p> <p>Multiple cable lengths available for all common applications</p> <p>Temperature Field calibration potentiometer</p> <p>Professional and practical product design</p> <p>Easy to use, install and maintain</p>
-----------------	---

<b>Product Range</b>	<table border="1"> <thead> <tr> <th data-bbox="193 1523 360 1718">Model</th> <th data-bbox="360 1523 525 1718">Sensor Accuracy</th> <th data-bbox="525 1523 651 1718">Power Supply</th> <th data-bbox="651 1523 815 1718">Output</th> <th data-bbox="815 1523 979 1718">Temperature Ranges</th> <th data-bbox="979 1523 1144 1718">Sensor Shape</th> <th data-bbox="1144 1523 1308 1718">Cable Length</th> <th data-bbox="1308 1523 1473 1718">Protection</th> </tr> </thead> <tbody> <tr> <td data-bbox="193 1718 360 1912">TUU1.AE</td> <td data-bbox="360 1718 525 2105" rowspan="2">± 0.5K± 0.5K over full measuring range</td> <td data-bbox="525 1718 651 2105" rowspan="2">AC/DC 24V (±10%)</td> <td data-bbox="651 1718 815 1912">0...10V*</td> <td data-bbox="815 1718 979 1912">-50...50°C</td> <td data-bbox="979 1718 1144 2105" rowspan="2">Sensor Pocket 50xØ6mm</td> <td data-bbox="1144 1718 1308 1912">1m</td> <td data-bbox="1308 1718 1473 2105" rowspan="2">IP65 to IEC60529</td> </tr> <tr> <td data-bbox="193 1912 360 2105">TUU1.BE</td> <td data-bbox="651 1912 815 2105">or</td> <td data-bbox="815 1912 979 2105">-20...80°C*</td> <td data-bbox="1144 1912 1308 2105">2m</td> </tr> <tr> <td colspan="3"></td> <td data-bbox="651 2105 815 2105">4...20mA</td> <td data-bbox="815 2105 979 2105">0...100°C</td> <td colspan="3"></td> </tr> </tbody> </table>								Model	Sensor Accuracy	Power Supply	Output	Temperature Ranges	Sensor Shape	Cable Length	Protection	TUU1.AE	± 0.5K± 0.5K over full measuring range	AC/DC 24V (±10%)	0...10V*	-50...50°C	Sensor Pocket 50xØ6mm	1m	IP65 to IEC60529	TUU1.BE	or	-20...80°C*	2m				4...20mA	0...100°C			
Model	Sensor Accuracy	Power Supply	Output	Temperature Ranges	Sensor Shape	Cable Length	Protection																													
TUU1.AE	± 0.5K± 0.5K over full measuring range	AC/DC 24V (±10%)	0...10V*	-50...50°C	Sensor Pocket 50xØ6mm	1m	IP65 to IEC60529																													
TUU1.BE			or	-20...80°C*		2m																														
			4...20mA	0...100°C																																

\*default values

All Information and technical data are subject to alteration

<b>Sensor Specification</b>	Sensor Specification	<p>Measured</p> <p>Sensor Characteristics</p> <p>Sensor Output (s)</p> <p>Output Load</p> <p>    0...10V output</p> <p>    4...20mA output</p> <p>Accuracy</p> <p>Measuring Range (s)</p> <p>Optional Measuring Range (s)</p>	<p>Temperature</p> <p>Active</p> <p>0...10V and 4...20mA</p> <p>Min. load 5kΩ @ AC/DC 24V</p> <p>Max. load 500Ω @ DC 24V</p> <p>see page 3</p> <p>-20°C...+80°C</p> <p>-50°C...+50°C ; 0°C...+50°C ; 0°C...+100°C</p>	
	<b>Technical Information</b>	Electrical Information	<p>Power Supply</p> <p>Frequency</p> <p>Terminal Clamp</p> <p>Power Consumption</p> <p>    Type with 0...10V output</p> <p>    Type with 4...20mA output</p>	<p>AC/DC 24V (±10%)</p> <p>50 / 60 Hz at AC 24V</p> <p>Screw terminal, max. 1.5mm²</p> <p>≤ 0.4W / AC 24V; ≤ 0.85VA / DC 24V</p> <p>≤ 20mA / DC 24V</p>
Mechanical Information		<p>Sensor shape</p> <p>Cable length</p> <p>Cable Entry</p> <p>Sensing Element Position</p>	<p>50xØ6mm</p> <p>See Product Range, Page 1</p> <p>M16, Ø6...Ø8mm cables</p> <p>external, top of the copper plate</p>	
Color and Materials		<p>Housing Cover</p> <p>Housing Bottom</p> <p>Lock Screws</p> <p>Lock Nuts</p> <p>Cable Gland</p> <p>Gland Rubber Seal</p> <p>Protection Caps</p> <p>Immersion Rod</p> <p>Cable</p>	<p>White ABS, RAL9001 (Cream White)</p> <p>White ABS, RAL9001 (Cream White)</p> <p>US:AISI 304; EU: EN X 6 CrNi 18 10; GER: W.N. 1.301</p> <p>Brass</p> <p>White ABS, RAL2002 (Vermilion)</p> <p>White TBS, RAL9010 (Pure White)</p> <p>White ABS, RAL2002 (Vermilion)</p> <p>US:AISI 304; EU: EN X 6 CrNi 18 10; GER: W.N. 1.301</p> <p>Silicon, (red)</p>	
Environmental Conditions		<p>Operation Temperature</p> <p>Operation Humidity</p> <p>Transport Temperature</p> <p>Transport Humidity</p> <p>Storage Temperature</p> <p>Storage Humidity</p>	<p>-25°C...+70°C</p> <p>100% r.h., with condensation</p> <p>-35°C...+70°C</p> <p>&lt; 90% r.h.</p> <p>-10°C...+70°C</p> <p>&lt; 85% r.h., no condensation</p>	
Norms and Directives		<p>IP- Rating</p> <p>Safety Class</p> <p>Product Standard 1</p> <p>Product Standard 2</p> <p>CE Conformities to</p> <p>CE Electromagnetic Compatibility Emitted Interference</p> <p>CE Electromagnetic Compatibility Interference resistance</p> <p>RoHS Compatibility</p> <p>Operation Climatic Condition</p> <p>Operation Mechanical Condition</p> <p>Transport to Climatic Condition</p> <p>Transport Mechanical Condition</p> <p>Storage Climatic Condition</p> <p>Storage Mechanical Condition</p>	<p>IP65 to IEC60529</p> <p>III to EN 60 730</p> <p>Automatic Electric. Controls for household and similar use</p> <p>2009/EN 60 730-1</p> <p>2004/108/EG Electromagnetic Compatibility EMV</p> <p>2000/EN60730-1 Emitted Interference</p> <p>2000/EN60730-1 Interference Resistance</p> <p>RoHS 3, Directive 2015/863</p> <p>IEC 60 721-3-3</p> <p>IEC 60 721-3-2 to class2M2</p> <p>IEC 60 721-3-2</p> <p>IEC 60 721-3-2 to class2M2</p> <p>IEC 60 721-3-1</p> <p>IEC 60 721-3-1 to class2M2</p>	
<b>Miscellaneous</b>		Accessories	Mounting Kit, Included in delivery	none
		Shipping & Handling	Minimum Order	1 box with 2 pieces, multiple of 2 pieces
			Package Material	Rigid Cardboards Packaging
			Order Code	See Product Range, Page 1, e.g. TUU1.AE

**Installation Notes**




Observe the following general regulation for engineering and implementation:

- All relevant national and heavy power regulations
- Other country specific regulations
- Country-specific regulations
- Local electrical supply authority regulation
- Schematics, cable listings, dispositions, specification and arrangements from the customer or engineering office in charge
- Third party specifications, e.g. general contractors or constructors

Advices

**Mounting Advices**

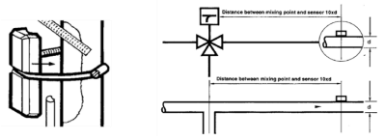

**Disposal Notes**




The device is considered an electronic device for disposal in terms of the EUROPEAN DIRECTIVE 2012/19/EU

The device may not be disposed as domestic garbage

The device must be disposed through channels provided for this purpose

It is mandatory to comply with local currently applying laws and regulations


Accuracy Curves

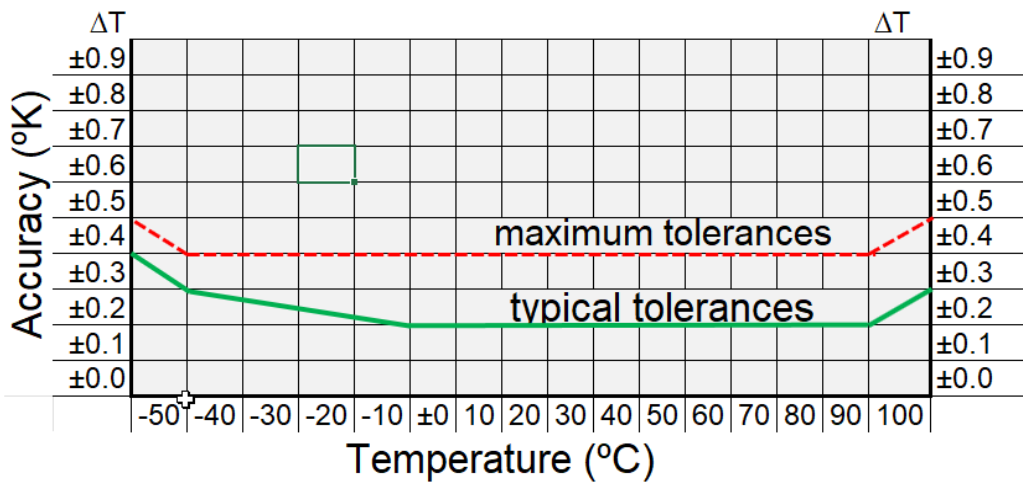

Connections & Settings

Terminals TUU.xE					
T1	T2	T3	T4	T5	T6
UB+	24V AC/DC	GND	Temperature	not in use	T passive
				S+	T passive
				S-	T passive

R1- Off-set potentiometer (TE)



DIP Settings TUU1.xE									
Temperature Setting (DIP1 & DIP2)						DIP3 / DIP4		DIP 5	
DIP1	DIP2	DIP1	DIP2	DIP1	DIP2	DIP3	DIP4	DIP5	DIP5
■	■	■	■	■	■	■	■	■	■
-50...50°C		0...50°C		-20...80°C		0...100°C		not used	4...20mA

Dimensional Drawing

