
 T18020en	<b>Technical Information</b>	
<b>TDI9- Series (T)</b>	<b>Duct Temperature Sensor with BACnet / Modbus RTU communication</b>	

The TDI9- Series (T) is designed to measure temperature in air ducts

The sensor operates with low power supply

BACnet MSTP and MODBUS RTU on board

The sensor output is via BACnet MSTP / Modbus RTU communication



<b>Use</b>	Compatible to all common HVAC DDC and Analog Controls systems, with Building Automation System
	Temperature measurement in air ducts
	Used in all common HVAC applications
	Used in Commercial and Industrial Buildings

<b>Features</b>	Sensor output via BACnet MSTP / Modbus RTU communication
	Selectable communication protocol
	Modern and practical product design
	Easy to use, install and maintain

<b>Product Range</b>	Temperature Sensor				Thermowell			
	Type Code	Power Supply	Output	Measuring Ranges	Immersion Pocket Dimensions	Type Code	Immersion Pocket Dimensions	Material
	TDI9.AA	AC/DC 24V (±10%)	BACnet MSTP*	-40...120°C	ø6x50mm	TPA0.Ga	ø9mmx50mm	V4A
TDI9.GA	ø6x100mm				TPA0.Ma	ø9mmx100mm	V4A	
TDI9.BA	ø6x150mm				TPA0.Ha	ø9mmx150mm	V4A	
TDI9.CA	ø6x200mm				TPA0.Ia	ø9mmx200mm	V4A	
TDI9.FA	ø6x250mm				TPA0.Ka	ø9mmx250mm	V4A	
TDI9.DA	ø6x300mm				TPA0.La	ø9mmx300mm	V4A	
TDI9.EA	ø6x450mm				TPA0.Na	ø9mmx450mm	V4A	
TDI9.AG	MODBUS RTU*				ø6x50mm	TPA0.Ga	ø9mmx50mm	V4A
TDI9.GG			ø6x100mm		TPA0.Ma	ø9mmx100mm	V4A	
TDI9.BG			ø6x150mm		TPA0.Ha	ø9mmx150mm	V4A	
TDI9.CG			ø6x200mm		TPA0.Ia	ø9mmx200mm	V4A	
TDI9.FG			ø6x250mm		TPA0.Ka	ø9mmx250mm	V4A	
TDI9.FG			ø6x300mm		TPA0.La	ø9mmx300mm	V4A	
TDI9.EG			ø6x450mm		TPA0.Na	ø9mmx450mm	V4A	

\*default setting

<b>Sensor Specification</b>	Sensor Specification	Measured	Temperature
		Sensor Characteristics H/T	Active
		Outputs	BACnet MSTP or Modbus RTU communication, RS485
		Accuracy	see Page 4
		Measuring Range (T)	-40°C...120°C
<b>Technical Information</b>	Electrical Information	Power Supply	AC/DC 24V (±10%)
		Frequency	50 / 60 Hz at AC 24V
		Terminal Clamp	Screw terminal, max. 1.5mm <sup>2</sup>
		Power Consumption	≤ 1W @ AC 24V / DC 24V
	Mechanical Information	Immersion Rod Diameter	Ø6mm
		Immersion Rod Length	see page 1
		Cable Entry	M16, Ø6...Ø8mm cables
		Sensing Element Position	external, top of the immersion rod
	Color and Materials	Housing Cover	White ABS, RAL9001 (Cream White)
		Housing Bottom	White ABS, RAL9001 (Cream White)
		Lock Screws	US:AISI 304; EU: EN X 6 CrNi 18 10; GER: W.N. 1.301
		Lock Nuts	Brass
		Cable Gland	White ABS, RAL2002 (Vermilion)
		Gland Rubber Seal	White TBS, RAL9010 (Pure White)
		Protection Caps	White ABS, RAL2002 (Vermilion)
		Immersion Rod	US:AISI 304; EU: EN X 6 CrNi 18 10; GER: W.N. 1.301
		Environmental Condition	Operation Temperature
	Operation Humidity		<85% r.h., no condensation
	Transport Temperature		-35°C...+70°C
	Transport Humidity		< 90% r.h.
	Storage Temperature		-10°C...+70°C
	TDI9-Series (T)		< 85% r.h., no condensation
	Norms and Directives		IP- Rating
		Safety Class	III to EN 60 730
		Product Standard 1	Automatic Electric. Controls for household and similar use
		Product Standard 2	2009/EN 60 730-1
		CE Conformities to	2004/108/EG Electromagnetic Compatibility EMV
		CE Electromagnetic Compatibility Emitted Interference	2000/EN60730-1 Emitted Interference
		CE Electromagnetic Compatibility Interference resistance	2000/EN60730-1 Interference Resistance
		RoHS Compatibility	RoHS 3, Directive 2015/863
		Operation Climatic Condition	IEC 60 721-3-3
		Operation Mechanical Condition	IEC 60 721-3-2 to class2M2
Transport to Climatic Condition		IEC 60 721-3-2	
Transport Mechanical Condition		IEC 60 721-3-2 to class2M2	
Storage Climatic Condition		IEC 60 721-3-1	
Storage Mechanical Condition		IEC 60 721-3-1 to class2M2	
<b>Miscellaneous</b>	Accessories	TDK0.G	
	Shipping & Handling	Thermowell 1 box with 2 pieces, multiple of 2 pieces Rigid Cardboards Packaging	
	Order Notes	See Product Range, Page 1, e.g. TDI9.AE	

All Information and technical data are subject to alteration

Modbus Parameters	Address Number	Register Description	
	0...3	Serial Number	actual version
	4	Software Version	actual version
	6	Modbus Address	Default 254, selectable 1...254
	8	Hardware Version	actual version
	10	Protocol	0= MODBUS RTU ; 1= BACnet MSTP
	11	Baud Rate autodetection	0= OFF ; 1= On
	15	Baud Rate, (if autodetection is OFF)	0= 9600 ; 1= 19.200 ; 2= 38.400 ; 3= 57.600 ; 4= 115.200
	34	Temperature, digital	actual value

BACnet Parameters	Supported BACnet Objects Types		
	analog-value		
	device		
	Supported BACnet Services		
	who-is		
i-am			
object-identifier, object-name, object-type, present-value, units, object-list, vendor-id, vendor-name, system-status, confirmed-service, unconfirmed-services			
MSTP Objects			
<b>analog-value</b>			
	BACnet Address	Default 127, selectable 0...127	
AV0	Baud rate autodetection	default 0, 0= OFF ; 1= ON	
AV1	Baud Rate, (if autodetection is OFF)	0= 9600 ; 1= 19.200 ; 2= 38.400 ; 3= 57.600 ; 4= 115.200	
AV3	Protocol	0= Modbus ; 1= BACnet	
AV4	Temperature	actual value (-40...120°C)	
<b>Device</b>			
	device-identifier		
	device-name		

**The function "Baud Rate autodetection" can only be used during the product is been setup. When the product is working with the BAS, the "Baud Rate autodetection" has to be set to 0= OFF and the actual Baud Rate has to be set.**

**Installation Notes**





Observe the following general regulation for engineering and implementation:

- All relevant national and heavy power regulation
- Other country specific regulations
- Country-specific regulations
- Local electrical supply authority regulation
- Schematics, cable listings, dispositions, specification and arrangements from the customer or engineering office in charge
- Third party specifications, e.g. general contractors or constructors

**Advices**

**Mounting Advices**




**Disposal Notes**




The device is considered an electronic device for disposal in terms of the EUROPEAN DIRECTIVE 2012/19/EU.

- The device may not be disposed as domestic garbage.
- The device must be disposed through channels provided for this purpose.
- It is mandatory to comply with local currently applying laws and regulations.

**Accuracy Curves**

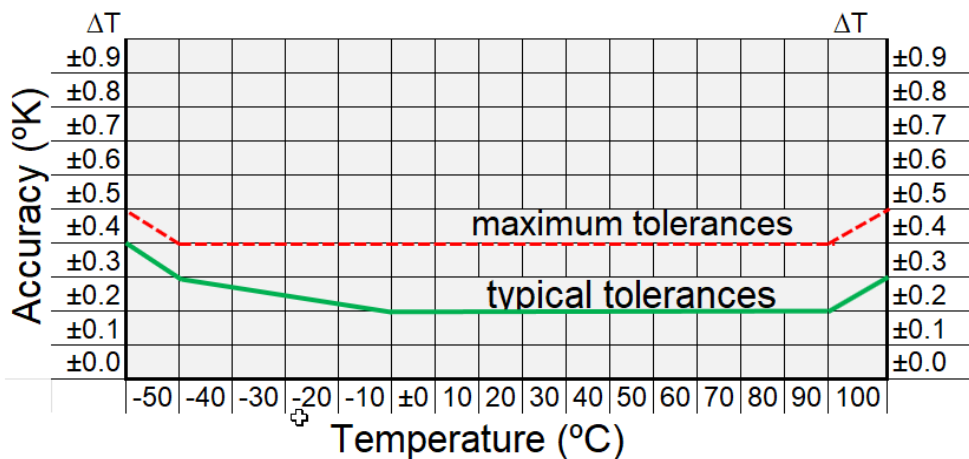

**Dimensional Drawing**

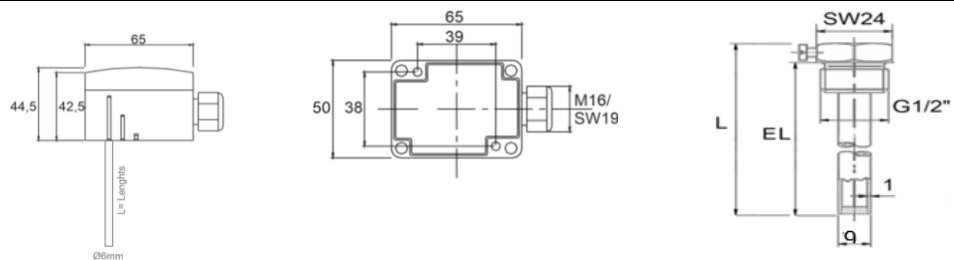

**Connections & Settings**

Terminals					
T1	T2	T3	T4	T5	T6
UB+	24V AC/DC	GND	RS485 - C-	RS485 - C+	n.A.
				n.A.	n.A.